

**Bands..... 169**  
**Buckles..... 170**  
**Cable Ties..... 171**  
**Clip, Ring & Pin Kits..... 168**  
**Clips, Rings & Pins..... 168**  
**Hose Clamps..... 170,171**

**Screw Anchor Expanders..... 168**  
**Strap Tensioners & Adaptors..... 172**  
**Tie Wire..... 172**  
**Tie Wire Accessories ..... 172**  
**Velcro Fasteners..... 169**





## Screw Anchor Expanders

**Features:**

- Quickly and securely set expansive screw anchors in masonry, regardless of thickness
- Patented

**Material:** Alloy Steel



SKU	Expansive Belt Size	Used With
332-868	1/4 in - 20	84299
332-870	3/8 in - 16	84305



The Right Connection™

## Air King Steel Safety Clips

**Features:**

- Same size for all coupling sizes



SKU	Quantity
238-AC1	25 per bag

## MASTERKIT

### Masterkit Cotter Pin Assortments

**Features:**

- Standard extended prong chisel point
- Made in the U.S.A

**Includes:** Polypropylene Box

**Finish:** Zinc Plated

**Includes:** (100) 1/8 x 1-1/4 in; (100) 3/32 x 1-3/4 in; (125) 3/32 x 1 in; (325) 1/16 x 1 in; (35) 5/32 x 2-1/2 in; (65) 1/8 x 2 in



SKU	Quantity
475-750-6	750 per set

**Includes:** (130) 1/8 x 2 in; (150) 3/32 x 1 in; (150) 5/64 x 1 in; (175) 1/8 x 1-1/4 in; (200) 3/32 x 1-3/4 in; (300) 1/16 x 3/4 in; (300) 3/64 x 1/2 in; (75) 5/32 x 2-1/2 in; Lip Guide; Specification Label

SKU	Quantity
475-1500-8	1,500 per set



## Hitch Pin Clip Assortments

**Features:**

- Reusable, quick release pins for fast assembly and disassembly

**Includes:** (15) 5/32 in #10; (20) 1/8 in #16; (20) 3/32 in #7; (30) 3/32 in #3; (5) 3/16 in #6; (60) 1/16 in #18; Plastic Box

**Material:** Spring Steel



SKU	Quantity
605-12915	150 per set


## O-Ring Assortments

**Features:**

- Creates a tight seal for fluid or gas connections

**Includes:** (140 pcs) - 1/16 in. Body; (80 pcs) - 1/8 in. Body; (80 pcs) - 3/32 in. Body; Plastic Box

**Material:** Buna-N



SKU
605-12930

## Precision Brand Cotter Pin Assortments

**Features:**

- Strong and flexible plated steel pins with one prong extended for easy insertion and bending

**Includes:** (100) 1/8 x 1-1/4 in; (100) 3/32 x 1-3/4 in; (130) 1/16 x 1 in; (150) 3/32 x 1 in; (40) 5/32 x 2-1/2 in; (80) 1/8 x 2 in; Plastic Box

**Material:** Steel



SKU	Quantity
605-12905	600 per set

## Roll Pin Assortments

**Features:**

- Flexible, cold rolled, hardened and tempered
- Chamfered ends simplify insertion

**Includes:** 4 Lengths Included for Each Size; Plastic Box

**Material:** Spring Steel



**Dia.:** 1/16 in; 5/64 in; 3/32 in; 1/8 in; 5/32 in; 3/16 in; 7/32 in; 1/4 in; 5/16 in; 3/8 in

SKU	Quantity
605-12925	300 per set



## Scotchmate™ Hook and Loop Reclosable Fasteners

### Features:

- Premium performance PSA polyester
- Simply pull the strips apart by hand to unfasten
- The hook strip is covered with tiny, stiff hooks
- The loop strip is covered with thousands of matching soft, pliable loops
- They can be ultrasonically welded to nylons or polyesters or sewn to a variety of substrates

**Base Material:** Polyester w/ Syn Rubber Adhesive

**Color:** Black

**Resistance:** Flame

**Style:** Hook Side

**Thickness:** 4.3 mm

**Width:** 1/2 in - 2 in



SKU	Width	Length
405-021200-23725	1 in	50 yd

## BAND-IT®

### BAND-IT® Bands

### Features:

- 201 stainless steel offers good resistance to oxidation and many moderate corrosive agents
- Utilized in general use banding applications
- Can be used with clip style buckles to create band clamps
- Packaged in a standard box or a durable plastic tote for easy dispensing

**Thickness:** 0.03 in

**Length:** 100 ft

**Material:** Stainless Steel 201

**Locking Type:** Ear-Lock Buckle

SKU	Width
080-C20499	1/2 in
080-C20599	5/8 in
080-C20699	3/4 in

### BAND-IT® Carbon Steel Bands

### Features:

- Galvanized carbon steel band offers medium strength coupled with good corrosion resistance in mild atmosphere and occasional fresh water
- Used with Ear-Lokt Style Buckle for medium duty applications
- Can be formed as single or double wrapped band configuration
- Utilized in general use banding applications

**Thickness:** 0.03 in

**Material:** Galvanized Carbon Steel

**Locking Type:** Ear-Lock Buckle

SKU	Width	Length
080-C30599	5/8 in	100 ft

## BAND-IT®

### BAND-IT® Totes



### Features:

- Color-coded for easy identification, these tough, new totes feature a convenient carrying handle and see through design to show remaining band
- Corresponding width buckles required

**Thickness:** 0.03 in

**Material:** Stainless Steel 201

**Locking Type:** Ear-Lock Buckle

**Length:** 100 ft

SKU	Width	Color
080-C204B9	1/2 in	Blue
080-C206R9	3/4 in	Red

### BAND-IT® Type 316 Bands

### Features:

- 316 stainless steel banding with superior corrosion resistance in marine atmospheres, mild chemicals and fresh water
- Used with BAND-IT Ear-Lokt Buckles
- Utilized in general use banding applications for marine splash zone
- Comes with Easy Scale patented imprint on the band to quickly determine band length without waste

**Thickness:** 0.03 in

**Tension Cap. [Max]:** 1,800 lb

**Material:** Stainless Steel 316

**Locking Type:** Ear-Lock Buckle

SKU	Width	Length
080-C40699	3/4 in	100 ft

## Strapbinder

### Steel Strapping

### Features:

- Regular duty strapping is manufactured from cold rolled steel under rigid quality control
- Precise uniformity in width, gauge and finish ensures trouble-free operation with automatic strapping machines and pneumatic or manual strapping tools
- Permits reduction of container board strength
- Has highly stable mechanical properties
- Withstands impact and resists abrasion
- Is impervious to ultraviolet light rays

**Material:** Steel

**Coating:** Painted & Waxed



SKU	Width	Thickness	Length	Tension Cap. [Max]
705-1007005	3/4 in	0.023 in	1,710 ft	2,070 lb
705-1007980	3/4 in	0.02 in	1,960 ft	1,760 lb

## BAND-IT®

### BAND-IT® Ear-Lokt Buckles

**Features:**

- Can be used with many types of Band-It® stainless steel banding providing superior fastening strength
- Ear-Lokt style buckle for standard duty applications including hose assemblies, cable bundling, and general fastening
- Can hold a single or double wrapped band configuration
- Band clamps can be formed over any contour or shape

**Material:** Stainless Steel 201

**Quantity:** 100 per box



SKU	Width
080-C25499	1/2 in
080-C25599	5/8 in
080-C25699	3/4 in

### BAND-IT Jr.® Smooth I.D. Clamps


**Features:**

- Vibration resistant lip wrap lock design
- Lock is formed by a simple lever movement
- No hammering or crimping
- Unique buckle nest and smooth ID design reduces leak paths compared to Center Punch Clamps
- Double wrapped for additional strength
- Various materials for different corrosive environments

**Clamp I.D.:** 13/16 in

**Thickness:** 0.025 in

**Material:** Stainless Steel 201



SKU	Width	Quantity
080-JS2019	3/8 in	100 per box

### BAND-IT® CP Series Center Punch Clamps

**Features:**

- Lock with impact from a hammer using a conical punch
- Double wrapped using 201 stainless steel or galvanized carbon steel
- Not recommended for use with fittings that may crack as a result of impact

**Clamp I.D.:** 4 in

**Thickness:** 0.025 in

**Material:** Stainless Steel 201



SKU	Width	Quantity
080-CP16S9	5/8 in	25 per box



The Right Connection™

### Boss Clamps

**Features:**

- It is suitable for rubber, plastic, and synthetic hoses
- Nut and bolt locking type
- The 2 in malleable iron Boss clamp is recommended to be shaped only once

**Material:** Malleable Iron

**Locking Type:** Nut & Bolt



SKU	Hose I.D.	Hose O.D.	Torque
238-BU29	2 in	2 1/2 in - 2 25/32 in	60 ft lb

### HSS Series Worm Gear Clamps

**Features:**

- Gear clamp is constructed with four parts
- Stainless steel resists corrosion and rusting
- The 1 5/16 in - 2 1/4 in clamp has a maximum torque of 30.00 in lb
- Worm drive buckle-grooved band lock and hex head screw type

**Bolt/Screw Size:** 5/16 in

**Bolt/Screw Type:** Hex Head

**Bolt/Screw Material:** Stainless Steel 305

**Material:** Stainless Steel 300

**Locking Type:** Worm Drive Buckle-Grooved Band



SKU	Hose O.D.	Torque	Quantity
238-HSS28	1 5/16 in - 2 1/4 in	30 in lb	10 per box



### 2-Ear Clamps, Zinc-Plated

**Features:**

- 2-Ear design gives increased clamping range
- Fast, simple, secure installation
- Ideal for air and fluid media lines
- Specially deburred edges reduce the risk of damage to the part being clamped
- Tamper-proof durable seal due to robust construction

**Clamp I.D.:** 1 in

**Material:** Steel, Material No. 1.0338/SAE 1008/1010, zinc plated

**Quantity:** 100 per bag



SKU	Clamp Dia	Thickness
320-10100022	19/32 in	0.0472 in
320-10100022	19/32 in	0.0472 in
320-10100029	13/16 in	0.059 in
320-10100029	13/16 in	0.059 in
320-10100029	13/16 in	0.059 in

FASTENERS, CLAMPS & STRAPS



## 2-Ear Crimp Clamps

### Features:

- Robust design for good, permanent sealing
- Ideal for air and liquid lines
- Fast, simple, secure installation
- Deburred edges prevents damage to clamped parts
- 2-Ear design gives increased clamping range

**Material:** Steel, Material no. 1.0338 / SAE 1008/1010

**Coating:** Zinc Plated



SKU	Clamp Dia	Width
320-10100016	1/2 in	0.512 in
320-10100019	9/16 in	0.591 in
320-10100024	5/8 in	0.709 in
320-10100027	3/4 in	0.787 in
320-10100030	7/8 in	0.906 in



## Cable Ties

### Features:

- Flexible design allows the use to slip ties easily under and around cables and harnesses
- Bend of the tail makes it easier to grasp, position and insert into the head
- Ties can be used with most standard tensioning/cutoff tools for fast production line fastening

**Material:** Nylon

**Locking Type:** Non-Releaseable Self Locking

SKU	Length	Bundle Diam	Loop Tensile	Quantity
<b>Color: Natural</b>				
500-06226	8 in	1.9 in	50 lb	100 per bag
<b>Color: Weather Resistant Black</b>				
500-06272	8 in	1.9 in	50 lb	1,000 per bag
500-06203	11 in	3.1 in	50 lb	100 per bag
500-06277	15 in	4 in	120 lb	500 per bag
500-06204	15 in	4.1 in	50 lb	100 per bag
500-06274	15 in	4.1 in	50 lb	500 per bag



## Heavy-Duty Cable Ties

### Features:

- Patented DoubleLock™ design has teeth on both sides of the tie, ensuring 50% greater strength than industry standards
- Ultraviolet black (UVB) ties resist harmful light rays – primarily for outdoor use




SKU	Length	Color	Tensile Strength	Quantity
623-46-415	1 in	White	120 lbf	50 per bag
623-46-412UVB	12 in	UV Black	120 lbf	100 per bag
623-46-424	13 1/2 in	White	175 lbf	50 per bag
623-46-415UVB	15 in	UV Black	120 lbf	50 per bag
623-46-418UVB	17 in	UV Black	175 lbf	50 per bag
623-46-436UVB	20 1/2 in	UV Black	175 lbf	50 per bag
623-46-421UVB	21 in	UV Black	175 lbf	50 per bag
623-46-424UVB	24 in	UV Black	175 lbf	50 per bag

## Standard Cable Ties

### Features:

- Patented DoubleLock™ design has teeth on both sides of the tie, ensuring 50% greater strength than industry standards
- Ultraviolet black (UVB) ties resist harmful light rays – primarily for outdoor use

**Tensile Strength:** 75 lbf

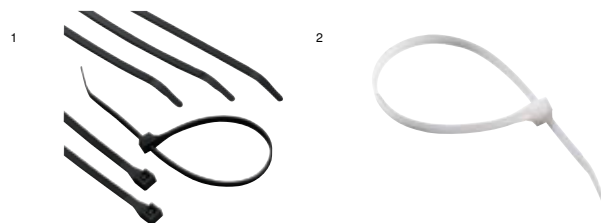

SKU	#	Length	Bundle Diam	Color	Quantity
623-46-308UVBMN	1	8 in	2 in	UV Black	1,000 per bag
623-46-308	2	8 in	2 in	White	100 per bag
623-46-308UVB	2	8 in	2 in	UV Black	100 per bag
623-46-308MN	2	8 in	2 in	White	1,000 per bag
623-46-310	2	11 in	3 in	White	100 per bag
623-46-310UVB	2	11 in	3 in	UV Black	100 per bag
623-46-310M	2	11 in	3 in	White	1,000 per bag
623-46-315	2	14 in	4 in	White	100 per bag
623-46-315UVB	2	14 in	4 in	UV Black	100 per bag
623-46-315M	2	14 in	4 in	White	1,000 per bag



## Mechanics Wire



### Features:

- Economical solution for many specialized application
- Controlled in production to secure full gauge, good finish and high quality

**Packing Type:** Spool

SKU	Wire Size	Length	Wt.	Material
132-77552	16 gauge	480 ft	5 lb	Black Annealed
132-77556	16 gauge	190 ft	2 lb	Black Annealed

## Tie Wires

### Features:

- These sturdy, versatile tie wires are efficient for indoor and outdoor jobs
- Made of stainless steel or black annealed finish, the tie wires are essential for fastening items together
- Wires have a high level of strength and are capable of handling heavy items



SKU	Wire Size	Material
132-77532	14 gauge	Black Annealed
132-16-SS	16 gauge	Stainless Steel
132-71572	16 gauge	Black Annealed
132-18-SS	18 gauge	Stainless Steel



## Tie-Wire Reels

### Features:

- Smooth aluminum alloy with wear parts made of steel
- Easily removable cover plate, rewind knob



SKU	Dia.	Width
409-27400	6 1/4 in	2 15/16 in



## Center Punch Clamping Tools

### Features:

- Ratchet action tensioning tool for applying Center Punch and Center Punch Open-End clamps with a Center Punch style lock
- 3/8in adapter included



SKU	Band Width
080-T30069	5/8 in

## The BAND-IT® Clamping Tools

### Features:

- Use to apply band, strapping and Free-End Clamps
- Spring-loaded gripper lever and friction-held cutoff lever with plastic grip improves ease-of-use



SKU	Band Width	Tension Cap. [Max]
080-C00169	3/16 in - 3/4 in	2,400 lb



The Right Connection™

## Band Clamp Tools

### Features:

- To be used to apply bands, the 3/8 in to 5/8 in tool is equipped with a spin handle
- The spin handle contains a retaining ring to keep the parts of the banding tool in place



SKU	Band Width
238-F100	3/8 in; 5/8 in

## Strapbinder

## Insulation Tensioners

### Features:

- Re-settable rack for additional take-up
- Thickness:** 0.023 in



SKU	Band Width
682-M1800	3/8 in - 3/4 in